





Image above represents broad outline of the project area as shown in 2018 MOVEBR tax plan proposition

## PROJECT: Jones Creek Road (Tiger Bend Road to Airline Highway)

MOVEBR Program ID: 22 Project Length (miles): 1.4 Estimated Cost: \$19,000,000

Funded from Proposition: \$19,000,0000


### **PROJECT OVERVIEW**

The proposition scope of work includes a new four-lane roadway. Jones Creek Road is a proposed greenfield project connecting Tiger Bend Road and Airline Highway, crossing Jefferson Highway. The proposed roadway might include a four-lane boulevard with a shared use path on each side.



### **TYPICAL SECTION**

The graphic below provides a conceptual view of the potential proposed improvements that will be considered for the project.

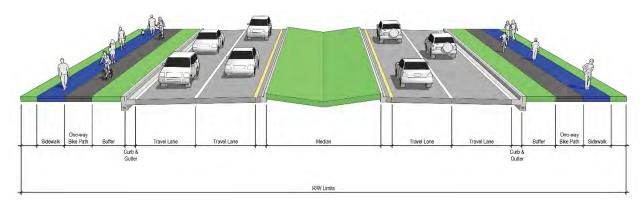

### **PROJECT STATUS**

This project is currently in the planning phase.

### **COMPLETE STREETS**

The MOVEBR Program has developed design guidelines that aim to instituntionalize the Complete Streets policy by accommodating people walking, biking or accessing transit, regardless of age and ability.

### DRAINAGE AND GREEN INFRASTRUCTURE CONSIDERATIONS

Fill mitigation, which serves to maintain overall floodplain storage, will occur on this project. Stormwater detention areas tying to the drainage system are being developed in conjunction with each new MOVEBR project.

Among the drainage considerations for this specific project are the following:

A portion or all of this project is located within a Special Flood Hazard Area (SFHA).



This project location was in an area identified as an "estimated inundation area" from the 2016 floods. This map can be viewed at

https://www.arcgis.com/home/webmap/viewer.html?webmap=cb332217bdab4572b4930e02d6655f84

Existing drainage for this project area utilizes an open (ditch) system, and the proposed drainage will utilize a closed (sub-surfaced) system.

Each project budget includes funding for green infrastructure to improve water quality and mitigate impacts of stormwater runoff. Examples of green infrastructure include but are not limited to porous pavement, creation or maintenance of a tree canopy, bioswales, planter boxes, rain gardens, and land conservation efforts.

### **ENVIRONMENTAL CONSIDERATIONS**

Initial reviews support the following:

Significant considerations have been identified and must be reviewed and potentially addressed. This includes wetlands possibly requiring mitigation.

\*Note that this is not exhaustive of possible future environmental considerations.

## TRAFFIC & SIGNALIZATION INTERSECTIONS

The Projected Average Daily Traffic (ADT) for year 2042 is 30,000 vehicles per day.

The current concept supports turn lanes at major intersections for budget purposes. Future traffic studies will identify locations for turn lanes, median openings and connections (driveways, side streets etc.).

Signal systems will be upgraded as a part of future projects if required due to future configurations.



### **UTILITIES CONSIDERATIONS**

A preliminary assessment of the project area provides for the utilities listed below. Potential utility relocation costs will be included in the project budget if the infrastructure is located within the utility's own servitude.


Possible Utilities	Existing	Adjust/Relocate
Underground Electric	No	No
Overhead Electric	Yes	Yes
Overhead Electric Transmission	Yes	No
Water	Yes	No
Sanitary Sewer	Yes	No
Communication	Yes	Yes
CATV	Yes	Yes
Gas Distribution	Yes	Yes
Pipeline	Yes	No

### **RIGHT OF WAY CONSIDERATIONS**

Minimal residential or commercial right of way acquisitions are anticipated at this time.

### PROJECT CONCEPT PLANS

The following pages provide a potential solution for the proposed project. The initial project features and layouts, shown within the concept plans, will be further refined through planning and design phases of the project.

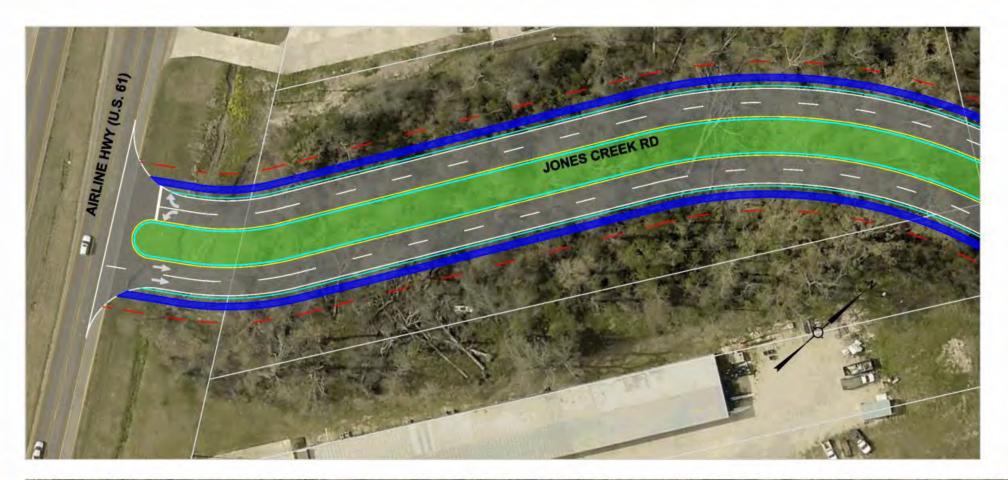









Sheet No.

1 of 5







**Pavement and Lane Striping** 

Sheet No.

2 of 5

11/06/2019





BR	
CITY OF BATON ROUGE	

Sheet No.

3 of **5** 









Sheet No.

4 of 5







Sheet No.

5 of 5

11/06/2019